E225W-FW144G



Specification

Display	
Active Screen Size	21.5" Diagonal Viewable
Native Resolution	1920 x 1080 Full HD
Refresh Rate	Up to 144Hz
Aspect Ratio	16:9
Pixel Pitch	0.0831 x 0.241mm
Dynamic Contrast Ratio	4,000 : 1 Typical
Color Gamut	105% sRGB ; 77% DCI-P3
Color Depth	16.7M (6-bit Hi-FRC)
Brightness (Typ.)	250 cd/m2
Viewing Angle	178˚ (Horizontal) / 178˚ (Vertical)
Response Time (GTG)	5ms (G-to-G) with OD
Backlight Life	30,000+ Hours
Features	
On Screen Display Control (OSD)	Quickstart, Color , Picture, and System
OSD Supported Languages	English (Default), French, Spanish
Auto Dynamic Contrast Mode	Yes

SCEPTRE®

Inputs & Outputs	
HDMI (# of Ports & Version)	2 x HDMI 1.4
Supported HDMI Signals	Up to 1920 x 1080 @ 144Hz
DP (# of Ports & Version)	1 x DP 1.2
Supported DP Signals	Up to 1920 x 1080 @ 144Hz
3.5mm Auxiliary Input Jack	Yes
3.5mm Headphone Jack (Output)	Yes
Mechanical Features	
Chassis Colors	Black
Tilt	15° Backward and 5° Forward
Neck Detachable	Yes
Slim Design	Ultra Slim
VESA Mount Pattern (mm)	75mm x 75mm
VESA Mount Screw Size (mm)	M4 x 8mm
Base Detachable	Yes
Neck Screw Size & Quantity (mm)	M4 x 10mm (2pcs)
Stand Screw Size & Quantity (mm)	N/A
Dimensions	
With Stand (inches, W x H x D)	19.5" x 14.6" x 7.02"
Without Stand (Inches, W x H x D)	19.5" x 11.2" x 1.44"
Carton Box Dimension (inches, W x H x D)	21.34" x 13.54" x 4.33"
Weight	
Net Weight with Stand (lbs)	5.00 lb
Net Weight without Stand (lbs)	4.47 lb
Gross Weight (lbs)	7.58 lb
Power	
Power Range (V, A, Hz)	AC-DC Adapter: Input: 100 – 240 VAC, 50/60 Hz, 1.0A (Max.) Output: 12V DC, 2.0A
Power Consumption (Typical)	18W
Power Standby Mode	< 0.5W
Regulations / Certifications	
Regulations	FCC, cTUVus, ISTA, RoHS, AER
General	
Warranty	One Year Limited Parts and Labor
What's in the Box?	
Power Cable	AC Adapter Cable x 1
Accessories	Monitor Display x 1, Neck x 1, Stand x 1, Neck Screws x 2, Screwdriver x 1, User Manual x 1


Key Features




Refresh Rate



sRGB

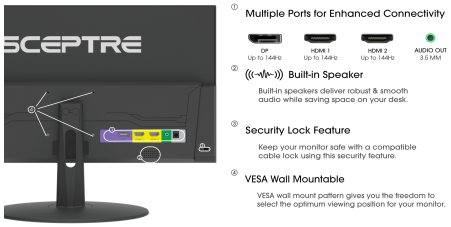

Multiple Ports

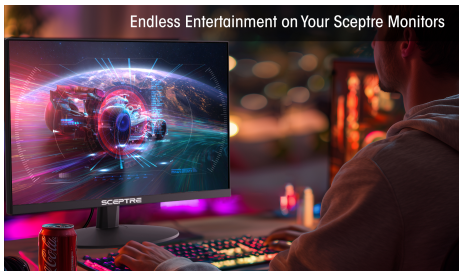

Lifestyle